

Nelplas Wall Protection Systems


Nelplas® Door Frame Protectors



NELPLAS Door Frame Protectors dramatically cut maintenance costs on expensive door frames. **NELPLAS**'s unique thermoforming capabilities provide form-fitting custom frame protectors that end frame maintenance and replacement. With low minimum quantities on custom orders, **NELPLAS** Door Frame Protectors are available in all standard **NELPLAS** colors and thicknesses.

NELPLAS Door Frame Protectors are backed by a limited five-year warranty. All Frame Protectors are Class I/A fire rated and meet national building code standards. All are formed with an acrylic/PVC base with excellent cleanability and impact resistance.

For more information on **NELPLAS** Door Frame Protectors or the **NELPLAS** Wall Protection System, please call your local **NELPLAS** distributor or 800-628-0449.

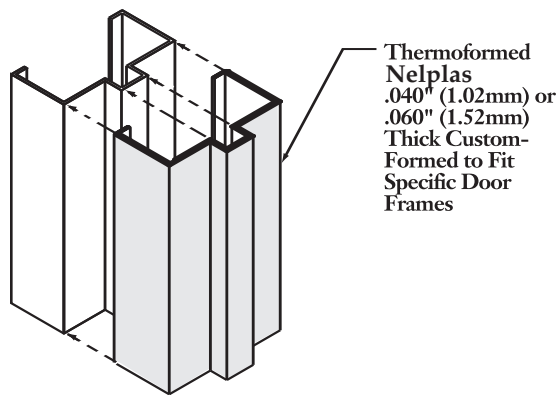

NDP

Product Guide Specification

SECTION 10 26 00 WALL AND DOOR PROTECTION

PART 1 GENERAL

1.01 SECTION INCLUDES

Thermoformed Door Frame Protectors.

1.02 SUBMITTALS

- A. Comply with requirements of Section 01 33 00 - Submittals.
- B. Product Data: Submit manufacturer's product data.
- C. Samples: Submit 12" (304.8mm) long sample of each type, thickness, size, and color to be installed for Architect's approval.

1.03 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials to site in manufacturer's original, unopened containers and packaging with labels clearly indicating manufacturer and material.
- B. Storage: Store materials indoors in a clean, dry area protected from damage and in accordance with manufacturer's instructions.
- C. Handling: Protect materials during handling and installation to prevent damage.

1.04 ENVIRONMENTAL REQUIREMENTS

- A. Maintain constant minimum air temperature of 65°F for a minimum of 48 hours before and during installation.
- B. Maintain wall and door surface temperature between 65°F and 85°F during installation.
- C. Do not install if relative humidity is greater than 80%.

PART 2 PRODUCTS

2.01 MANUFACTURER

Nelplas Wall Protection Systems.
A Division of RJF International Corporation

2.02 WALL AND DOOR PROTECTION

Nelplas Thermoformed Door Frame Protectors:
Rigid high-impact acrylic/polyvinyl chloride (PVC) Thermoformed Door Frame Protectors.

1. Fire Rating: [Class I/A] [Class II/B].
2. Thickness: Standard—[0.040" (1.02mm)] [0.060" (1.52mm)]; Custom—[0.080" (2.03mm)]. Uniform thickness with no thinning at edges.
3. Sizes: _____ (List door frame sizes)
4. Profile: Single piece.
5. Color: Color to be selected by Architect from manufacturer's standard colors.

2.03 ADHESIVES

Furnish adhesives approved by wall and door protection manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

Inspect surfaces to receive wall and door protection. Notify the Architect in writing if wall surfaces are not acceptable. Do not begin installation until unacceptable conditions have been corrected.

3.02 SURFACE PREPARATION

Prepare surfaces in accordance with manufacturer's written instructions.

3.03 INSTALLATION

- A. Install wall and door protection in accordance with manufacturer's written instructions.
- B. Allow wall and door protection and adhesives to precondition for a minimum of 24 hours at a temperature between 65°F and 85°F before installation.
- C. Install wall and door protection plumb and at height as indicated on the drawings, with surfaces free from distortion.

3.04 CLEANING

- A. Clean wall and door protection in accordance with manufacturer's instructions.
- B. Remove excess adhesive.

NELPLAS[®]
Wall Protection Systems

800-628-0449 • www.nelplas.com • Division 10 26 00