

# Nelplas Wall Protection Systems


## Nelplas® Door Lever & Knob Protectors




**NELPLAS** Door Lever and Knob Protectors dramatically cut maintenance costs on expensive door levers and knobs. **NELPLAS**'s unique thermoforming capabilities provide rugged protection that ends costly maintenance and replacement. With a variety of standard products, Door Lever and Knob Protectors can protect virtually all doors. Standard thickness is .125" (3.18mm).

**NELPLAS** Door Lever and Knob Protectors are backed by a limited five-year warranty. All are formed with an acrylic/PVC base with excellent cleanability and impact resistance.


For more information on **NELPLAS** Door Lever and Knob Protectors or the **NELPLAS** Wall Protection System, please call your local **NELPLAS** distributor or 800-628-0449.

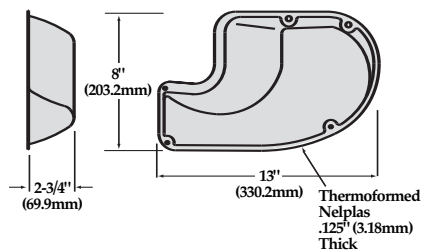

**NHP-3L**

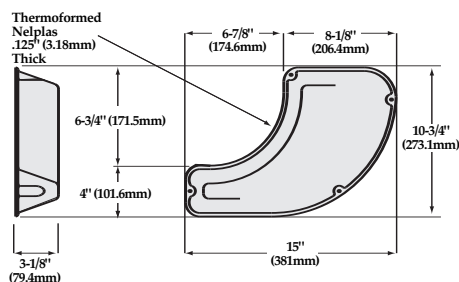

**NHP-6L**

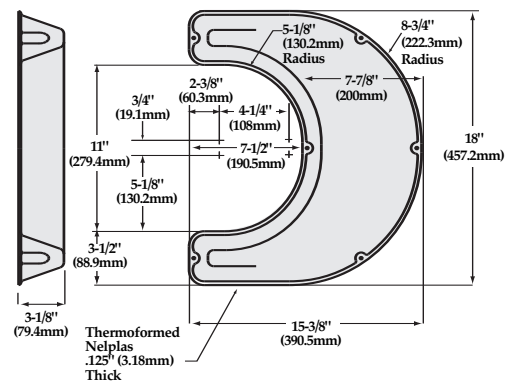

**NHP-7**

# Product Guide Specification

## SECTION 10 26 00 WALL AND DOOR PROTECTION

---

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

Door Lever and Knob Protectors.

#### **1.02 SUBMITTALS**

- A. Comply with requirements of Section 01 33 00 - Submittals.
- B. Product Data: Submit manufacturer's product data.
- C. Samples: Submit sample of each model and color to be installed for Architect's approval.

#### **1.03 DELIVERY, STORAGE, AND HANDLING**

- A. Delivery: Deliver materials to site in manufacturer's original, unopened containers and packaging with labels clearly indicating manufacturer and material.
- B. Storage: Store materials indoors in a clean, dry area protected from damage and in accordance with manufacturer's instructions.
- C. Handling: Protect materials during handling and installation to prevent damage.

### **PART 2 PRODUCTS**

#### **2.01 MANUFACTURER**

Nelplas Wall Protection Systems.  
A Division of RJF International Corporation

#### **2.02 WALL AND DOOR PROTECTION**

Nelplas Door Lever/Knob Protector:  
Rigid high-impact acrylic/polyvinyl chloride (PVC) thermoformed protectors.

- 1. Model: [K100] [K200] [K300] [K350] [K400] [K500] [K600] [K650] [K700].
- 2. Thickness: 0.125" (3.18mm).
- 3. Color: Color to be selected by Architect from manufacturer's standard colors.

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

Inspect door surface and lever/knob to receive Lever/Knob Protector. Notify the Architect in writing if conditions are not acceptable. Do not begin installation until unacceptable conditions have been corrected.

#### **3.02 INSTALLATION**

- A. Install door Lever/Knob Protector with appropriate quantity and type of threaded fasteners.
- B. Install door Lever/Knob Protector at proper location/orientation to door lever/knob.

**NELPLAS**®  
Wall Protection Systems

800-628-0449 • [www.nelplas.com](http://www.nelplas.com) • Division 10 26 00

® is a registered trademark of RJF International Corporation.